


Fig. 7

1



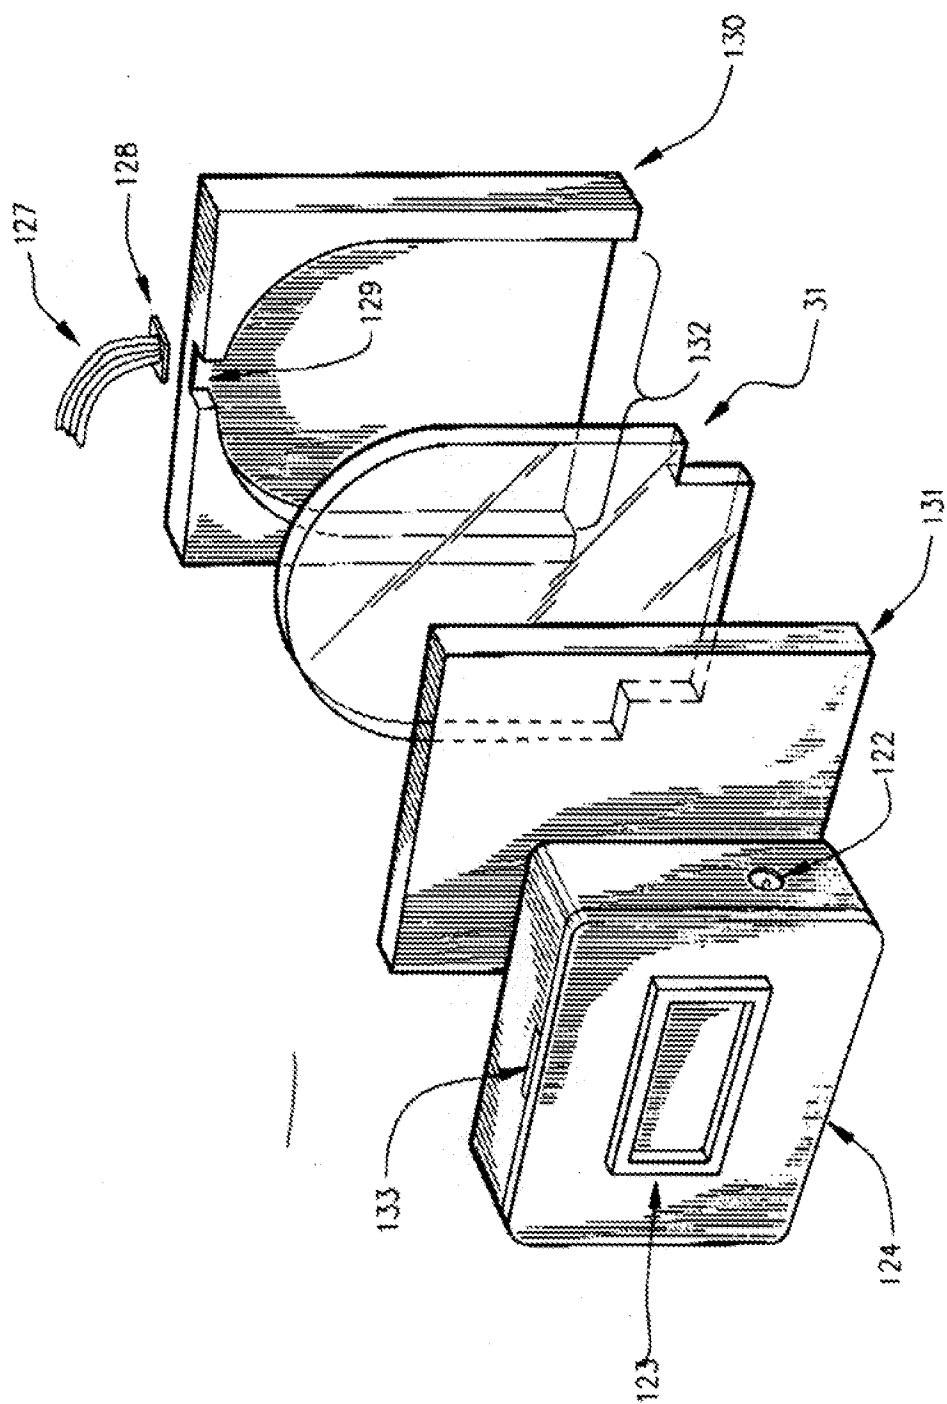


Fig9

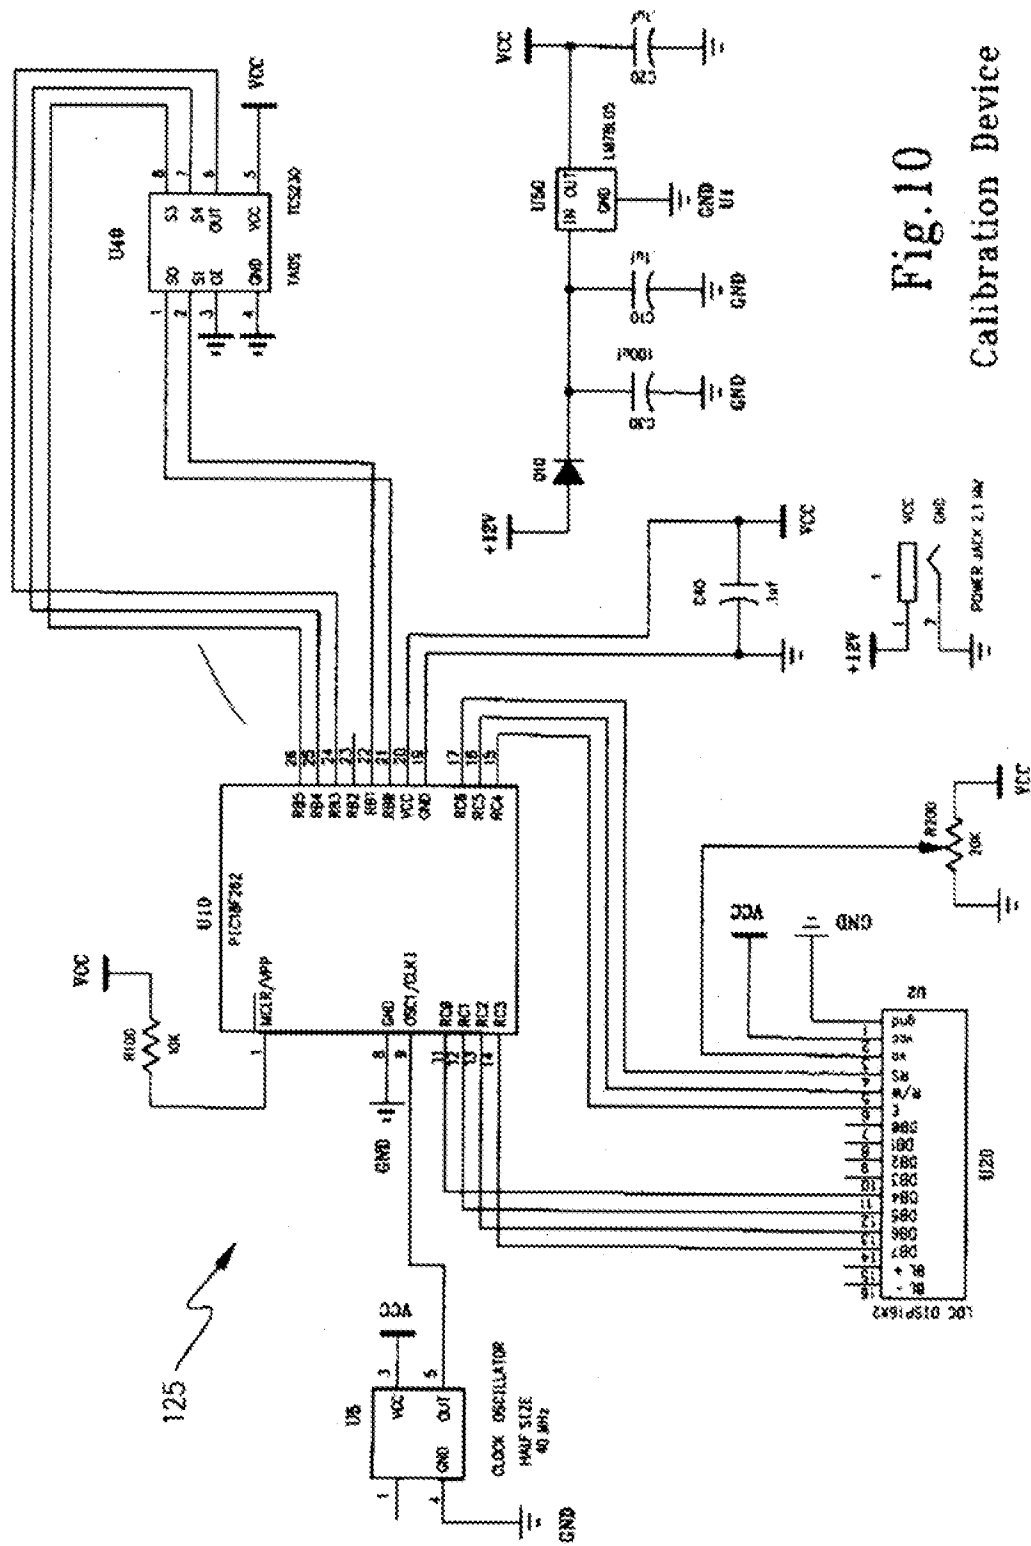


Fig. 10  
Calibration Device



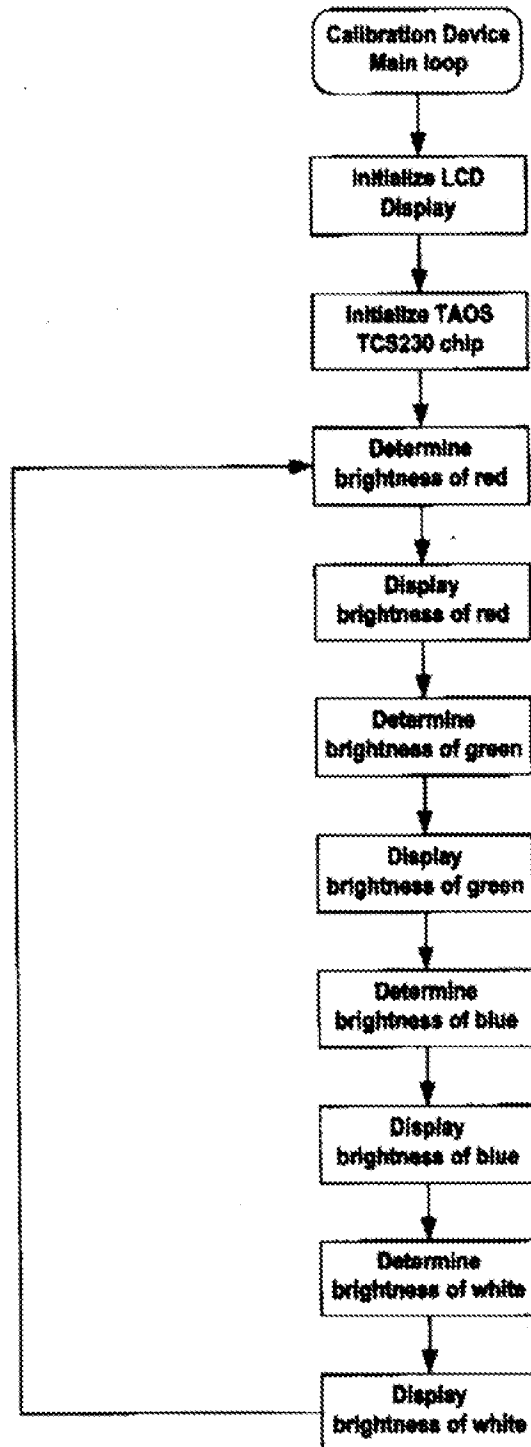


Fig.11

Calibration Device  
Main Loop

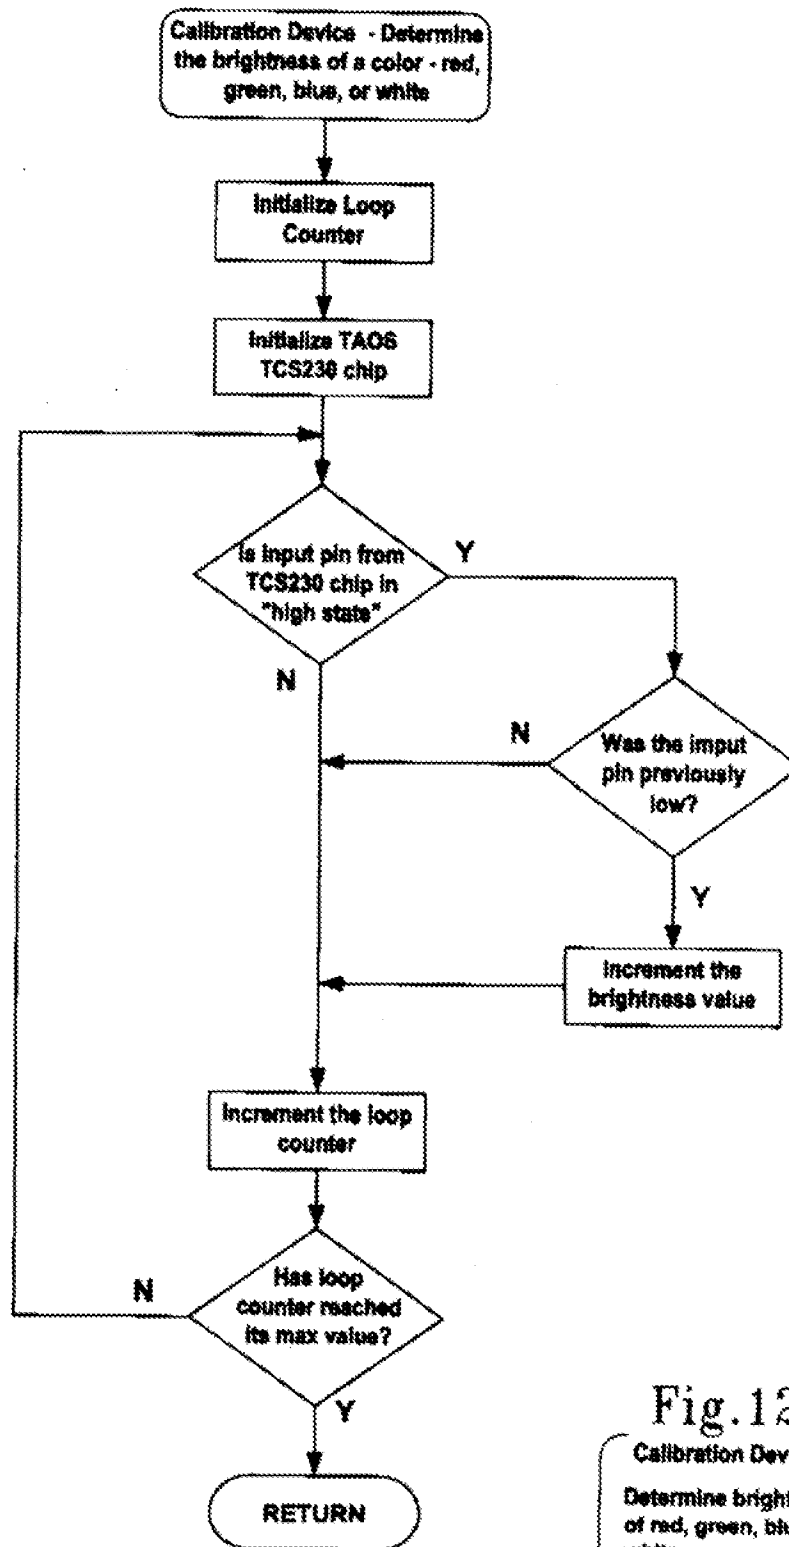


Fig.12

Calibration Device  
Determine brightness  
of red, green, blue, or  
white

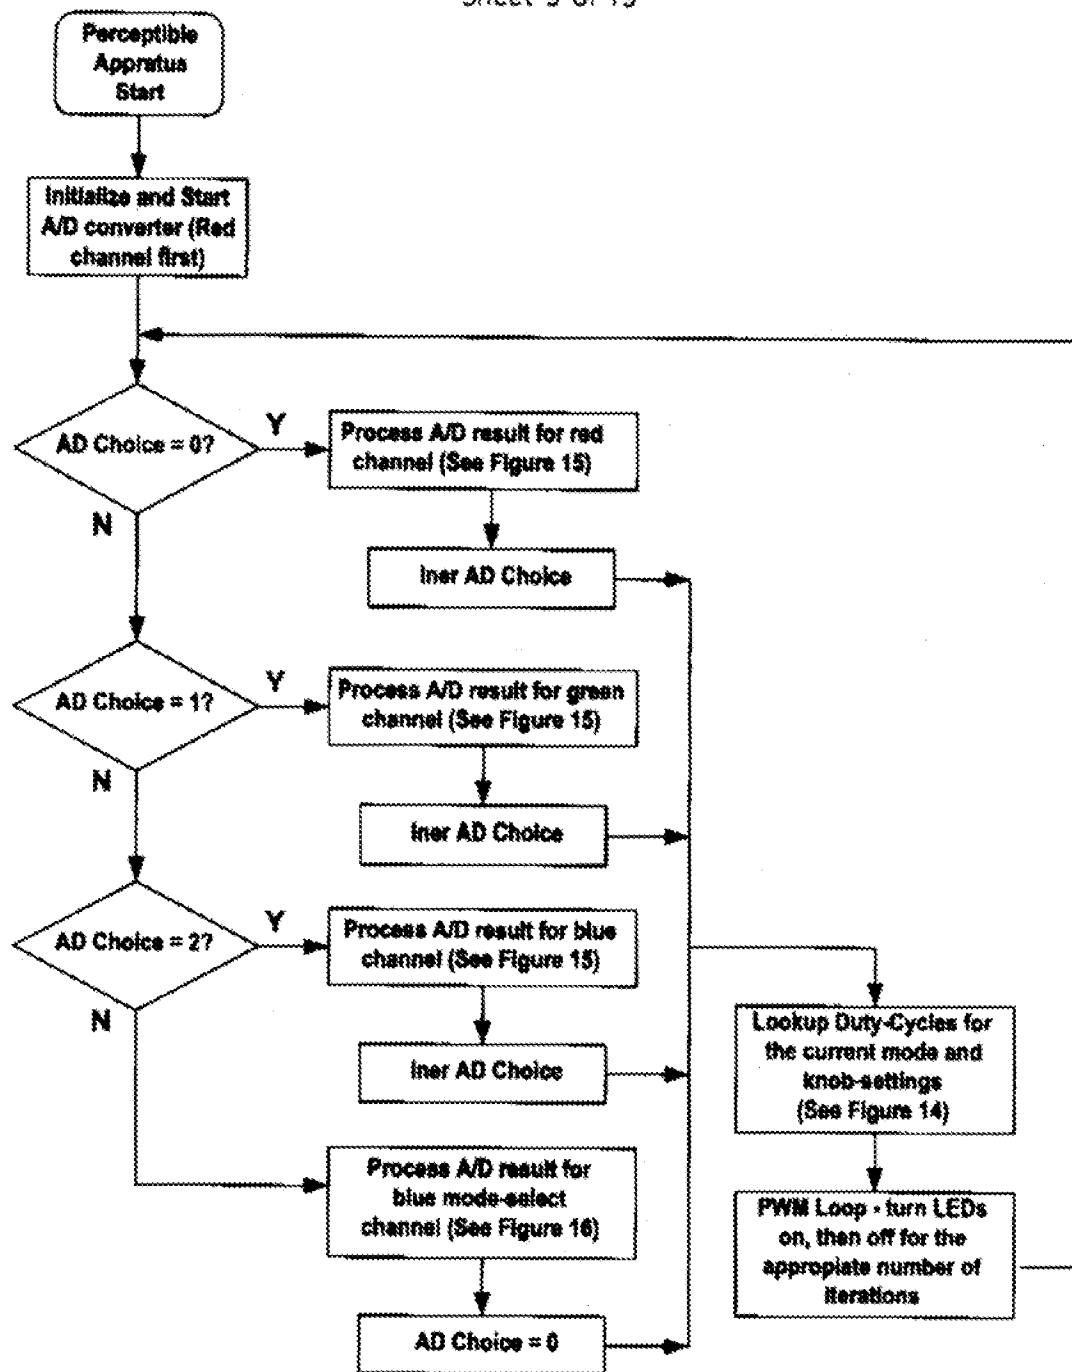


Fig. 13

Perceptible  
Apparatus  
Main Loop

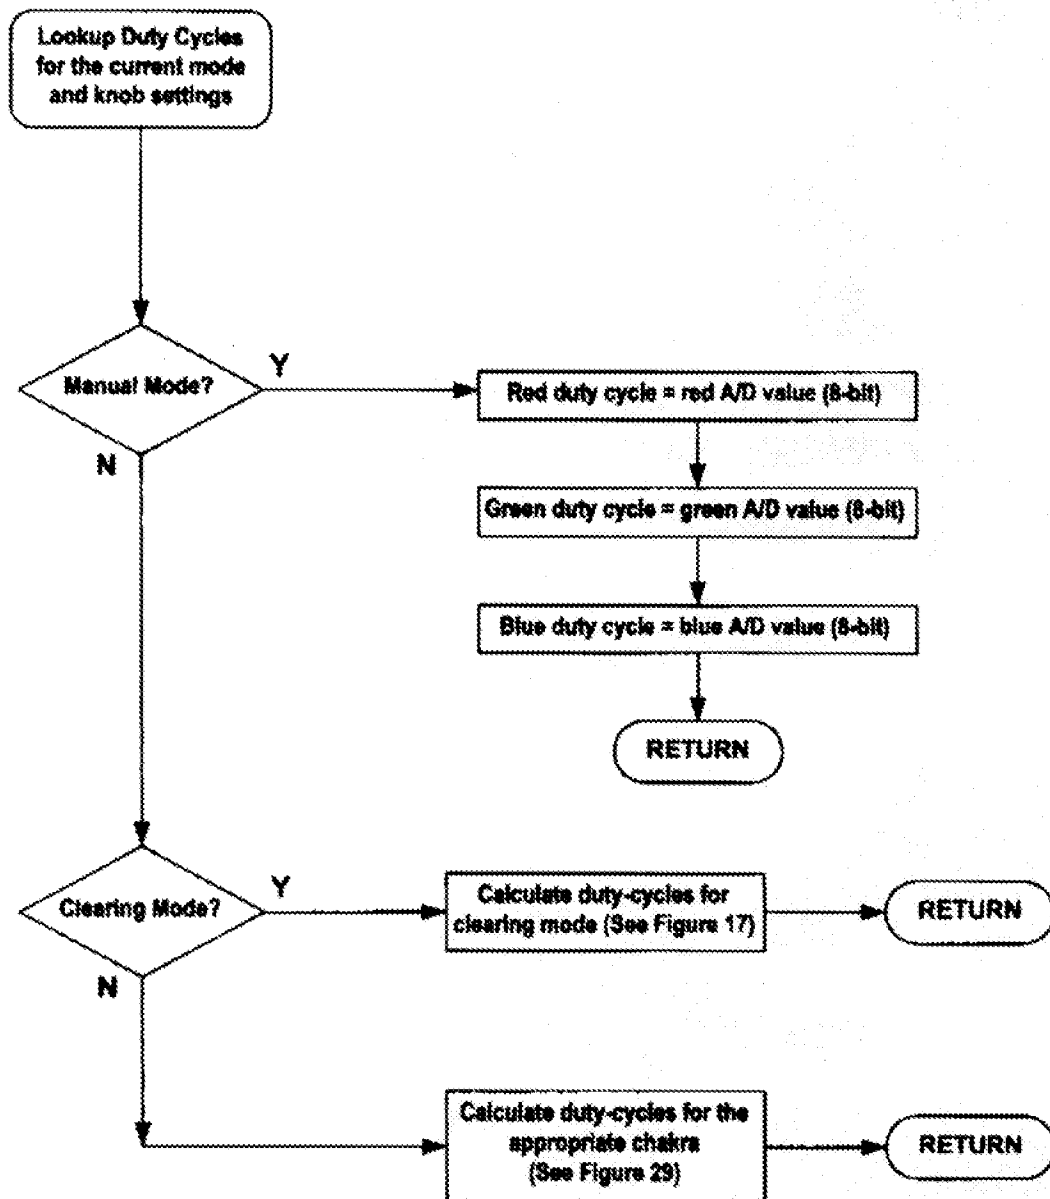


Fig.14

Perceptible Apparatus - Lookup  
Duty cycles based upon current  
mode and knob settings

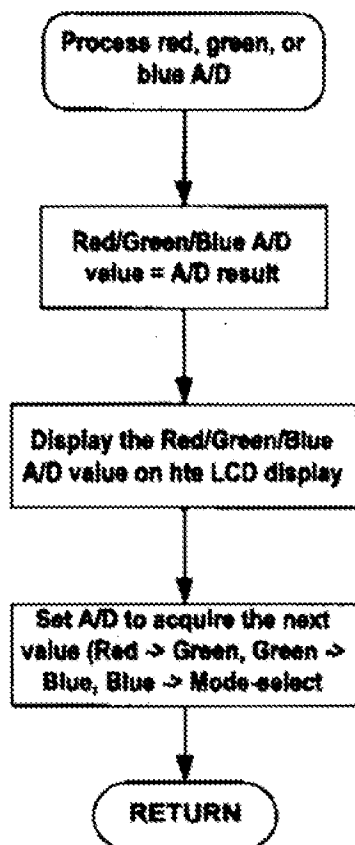


Fig.15

Perceptible Appratus - Process  
red, green, or blue A/D

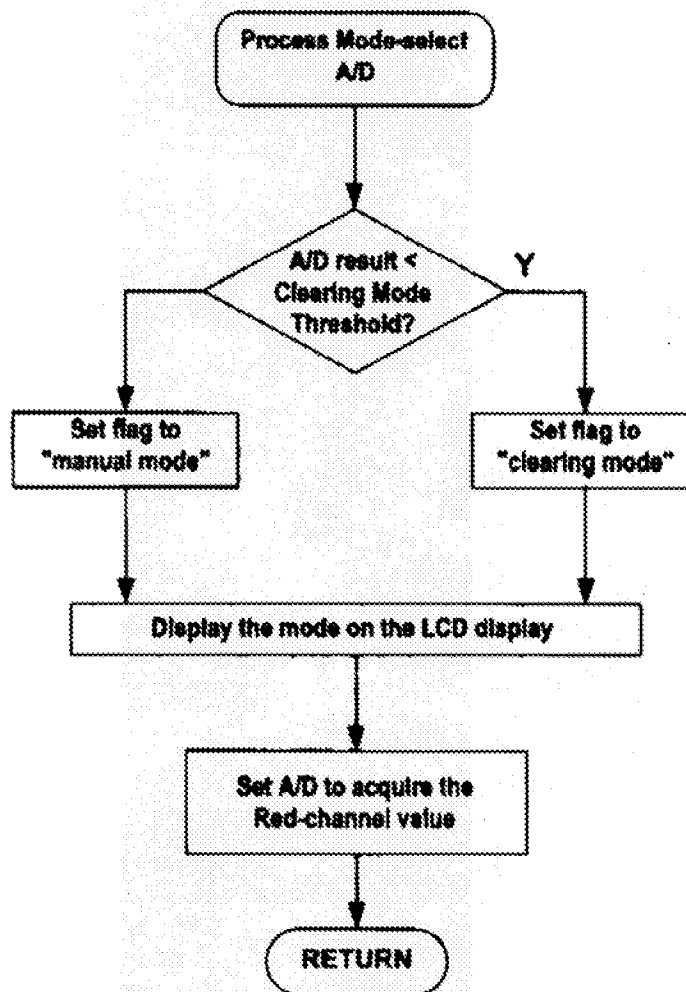


Fig.16

Perceptible Appratus - Process  
mode-select A/D

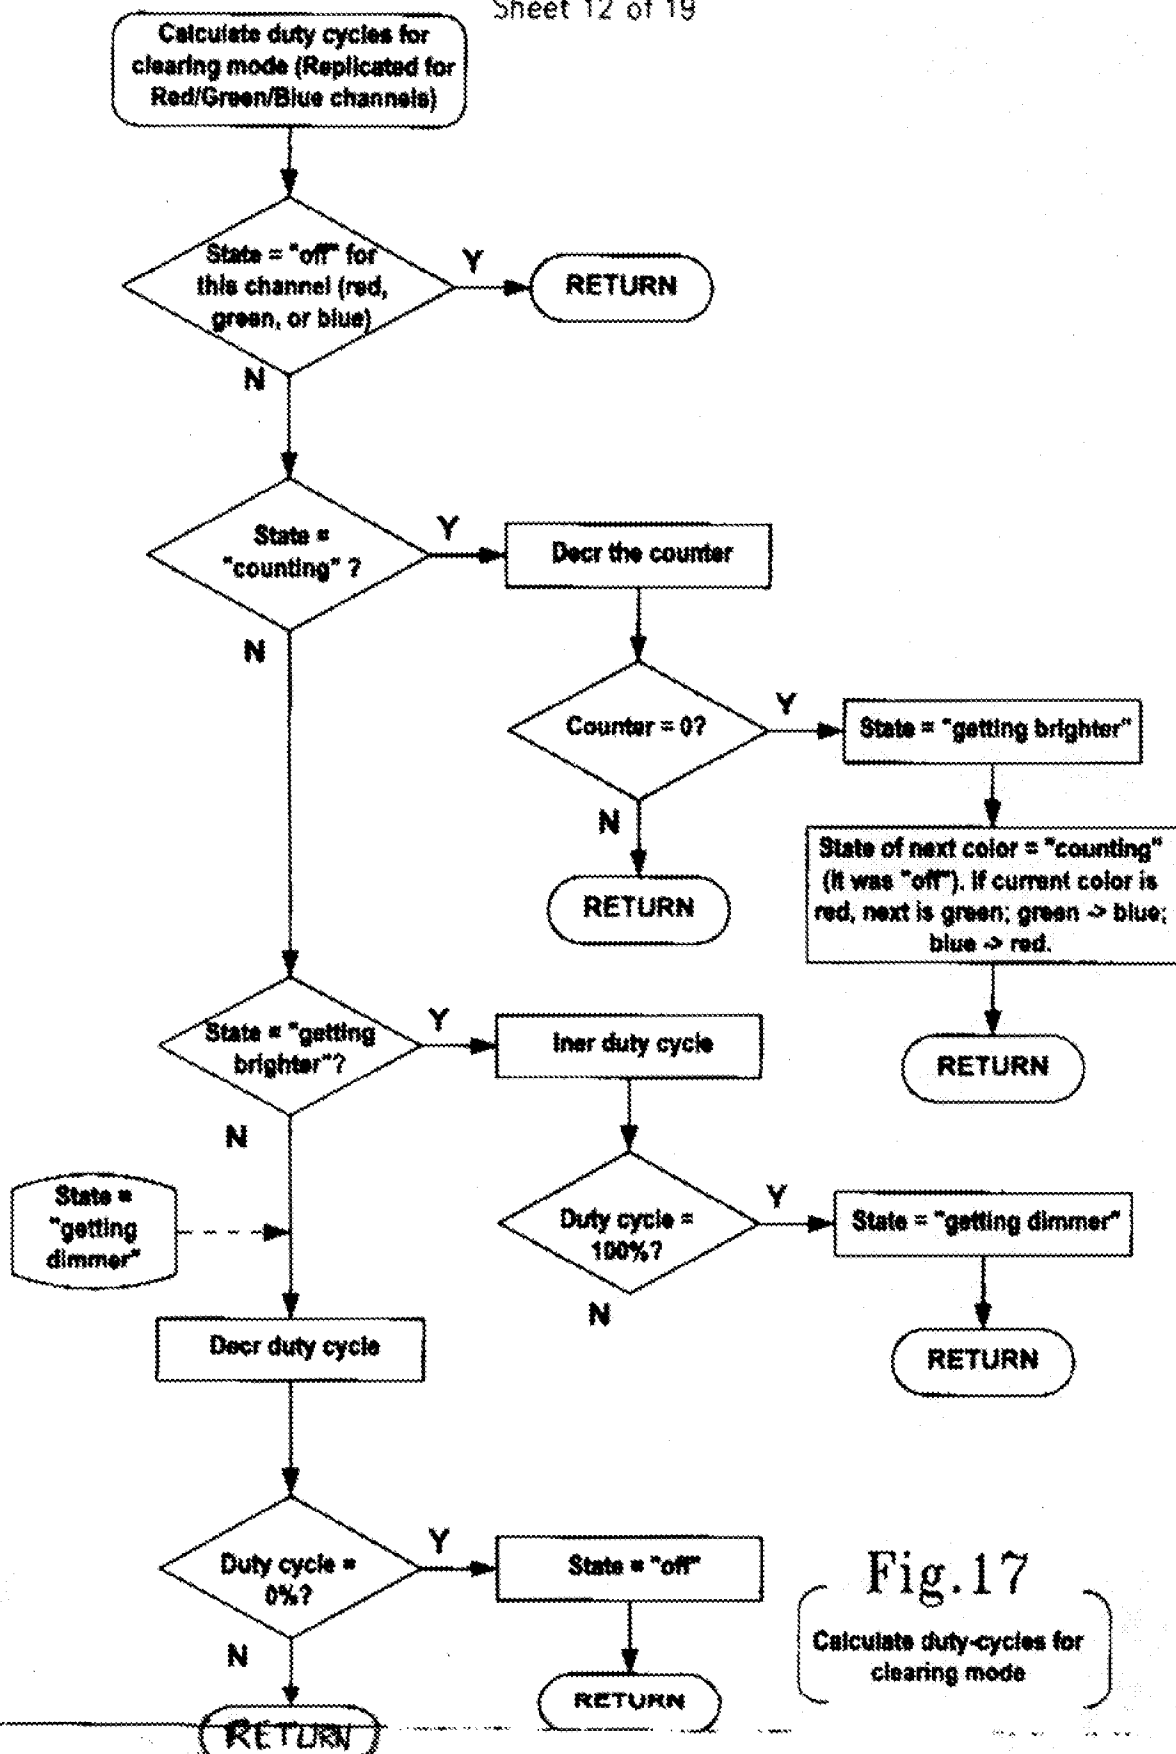


Fig.17

Calculate duty-cycles for clearing mode

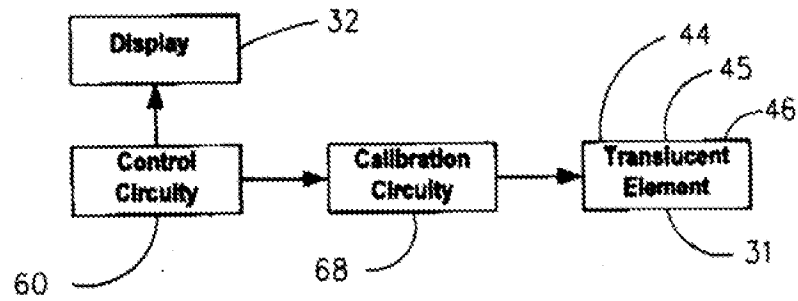


Fig.18

Block Diagram  
Energy Machine

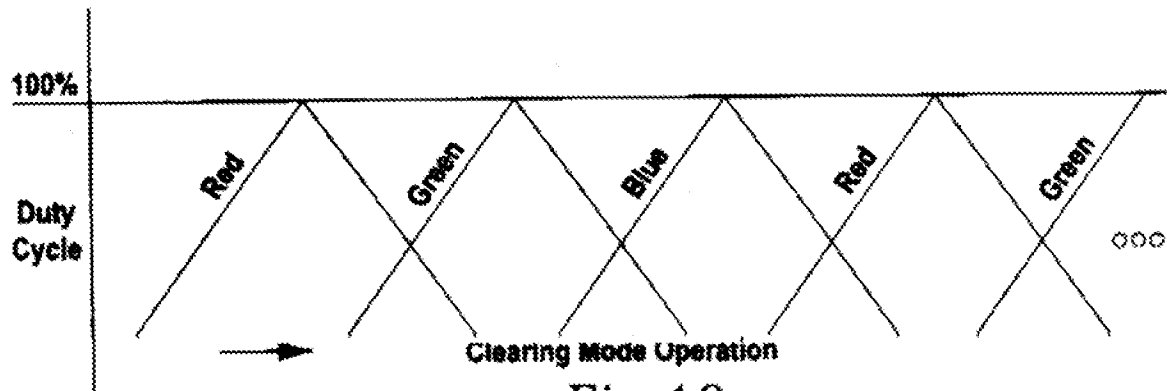


Fig.19

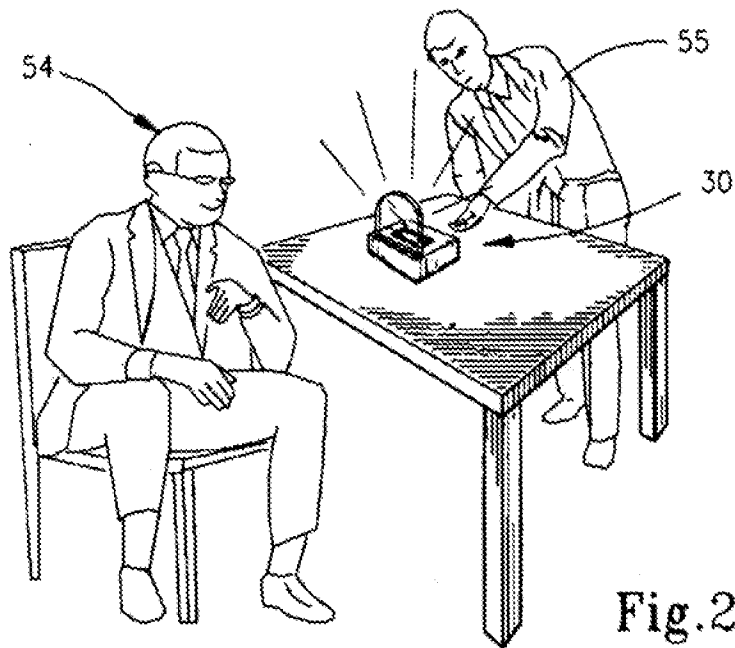


Fig. 20

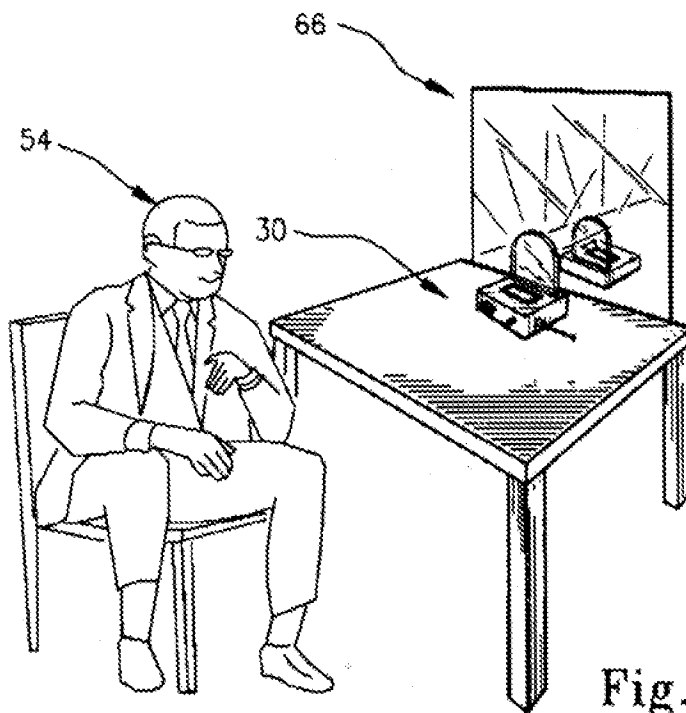


Fig. 21



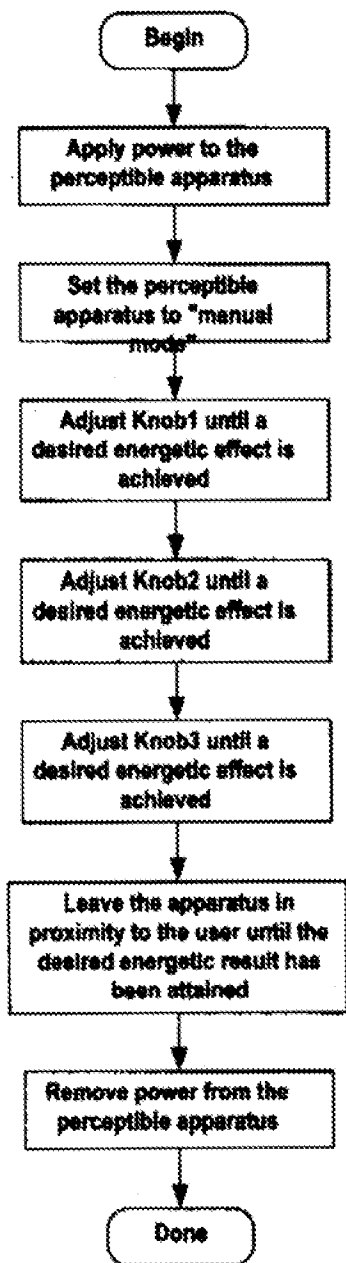


Fig.22

Method of use - Manual Mode  
(exemplary embodiment of the present invention)

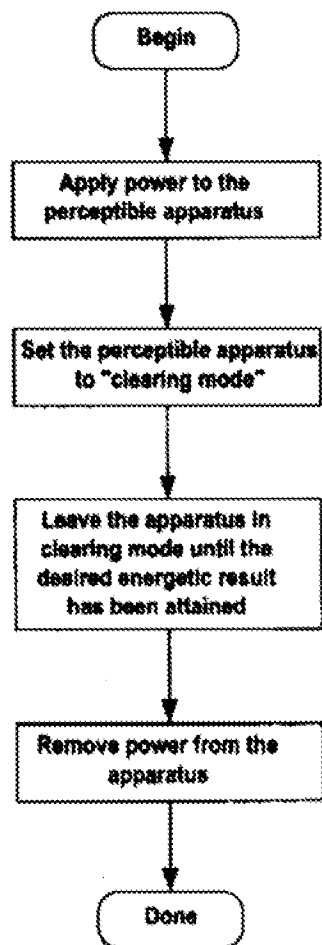


Fig.23

Method of use - Clearing Mode  
(exemplary embodiment of the present invention)

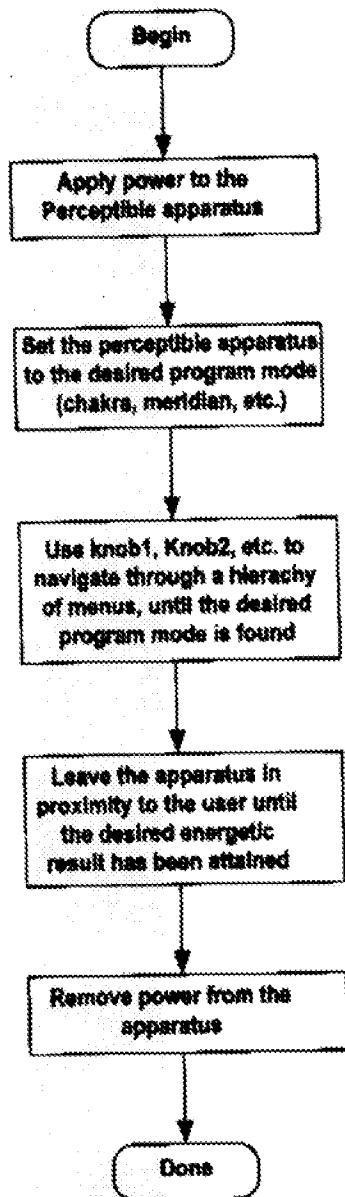


Fig.24

Method of use - Program  
Mode  
(exemplary embodiment of  
the present invention)

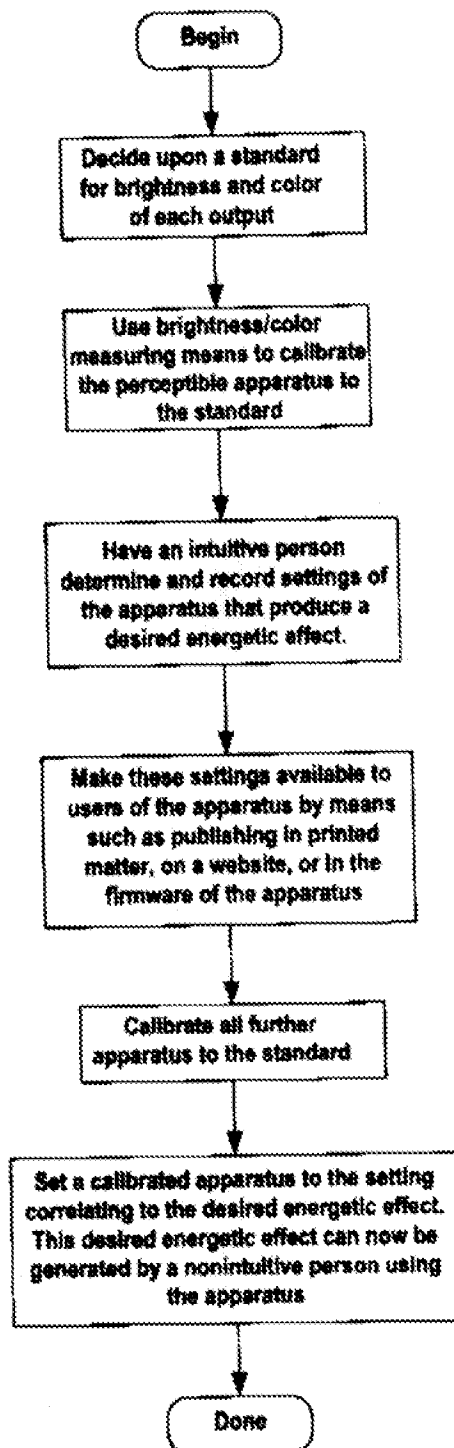


Fig.25

Process for replicating an  
energetic effect

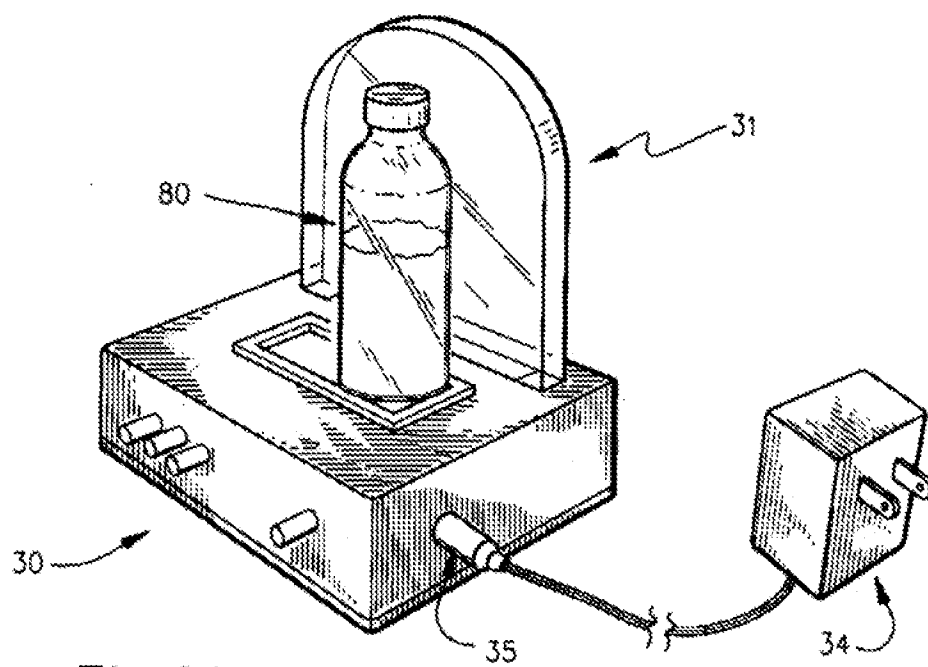


Fig.26

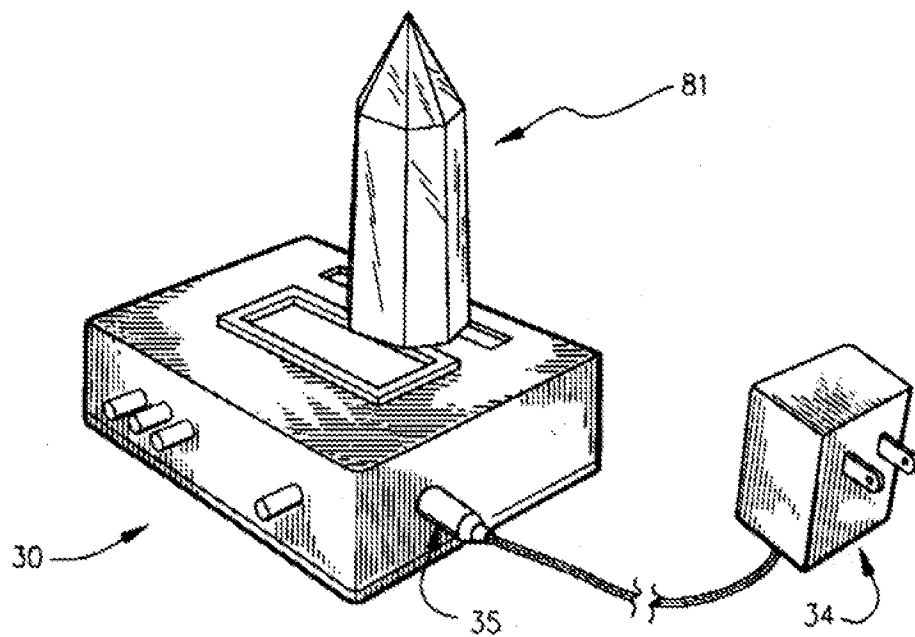


Fig.27

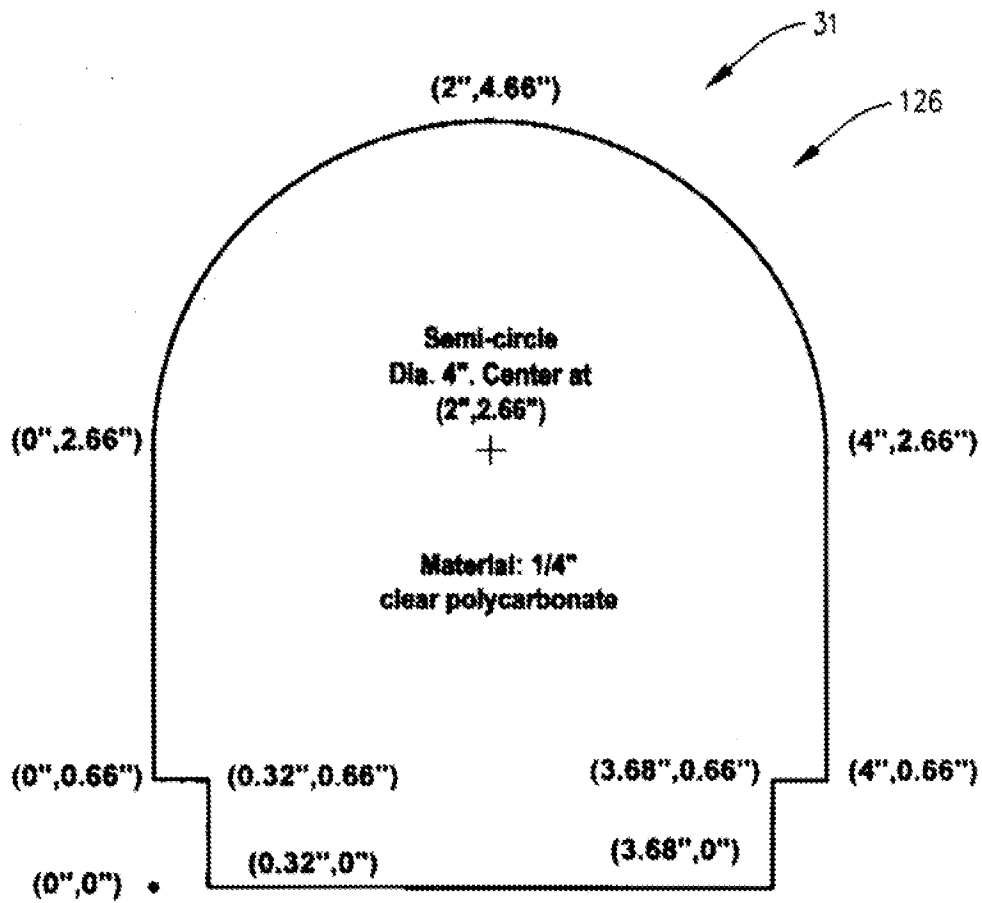


Fig.28

Dimensions of translucent element 31  
used in exemplary embodiment of  
program mode

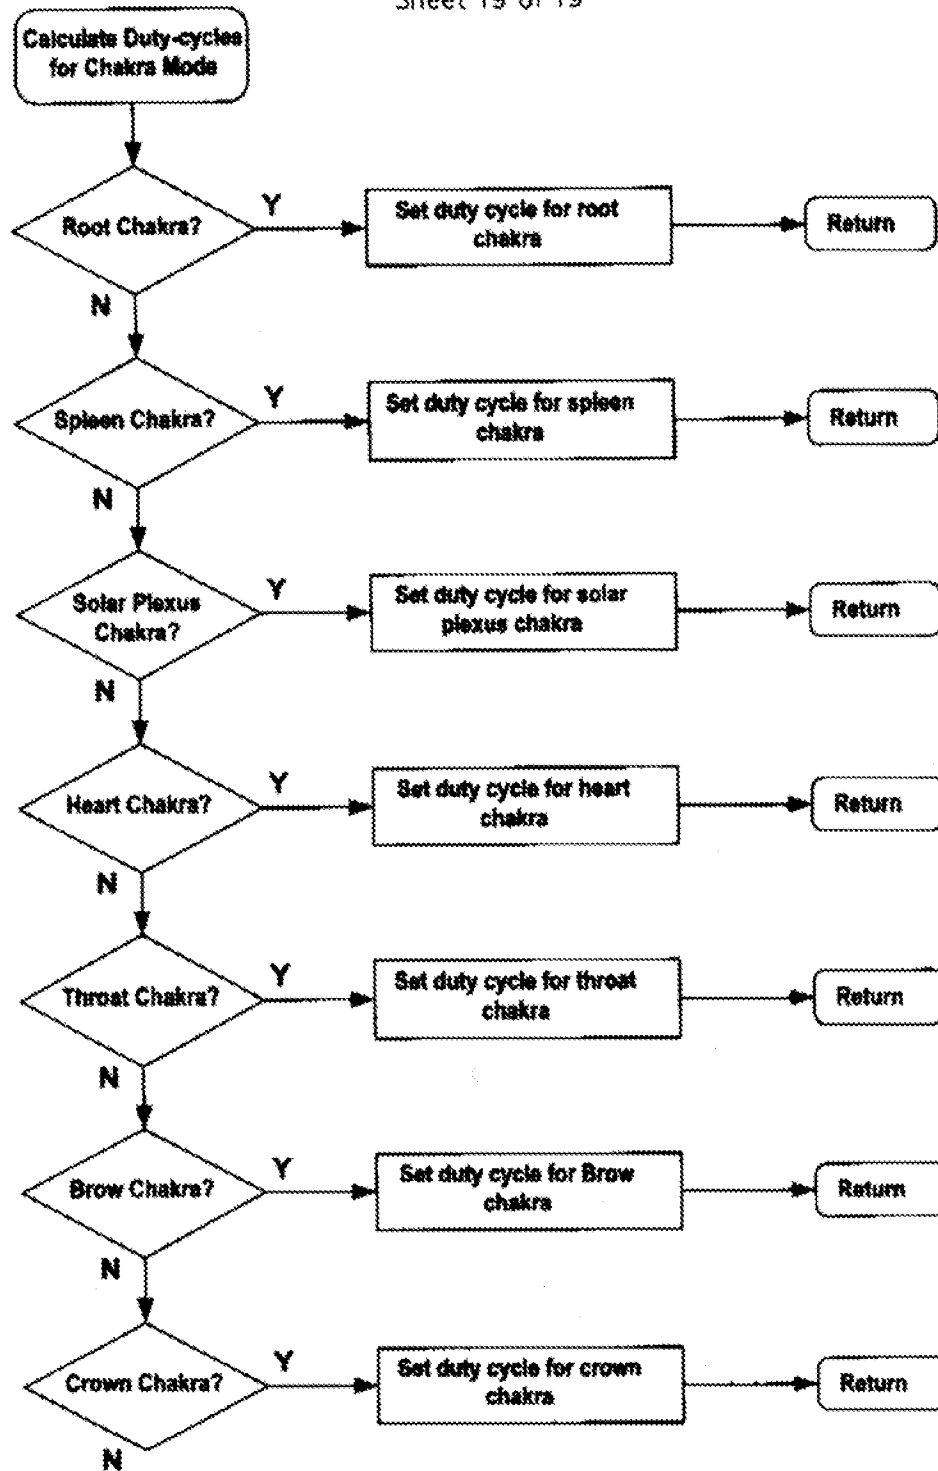


Fig.29

Calculate duty-cycles  
for chakra mode